



- ◆PRINT THIS PAGE
- ◆VIEW REPAIR PARTS
- ◆BACK TO
- ◆HOME

PITLESS UNITS FOR FLOWING WELLS

Available for 4, 5 and 6 inch well sizes with threaded attachment to casing. Submersible model pitless units are available with a special spool for sealing wells where the well water rises above frost level. A hold-down spider with set screws, attached to the lift-out pipe holds the spool in position in the discharge body, preventing the spool from rising from hydraulic pressure. The special spool is tapped for four (4) water-tight cable seals, (1) seal per wire.

Add the letter "F" to the ordering number of the threaded 4, 5 or 6 inch submersible pitless unit desired listed. EXAMPLE: 4PS45BS4C0F.

NOTE: Spool cable seals must be ordered separately.

Spool Cable Seals

Ord. No.	Cable Range	Cable Size	Cable Material
PS321	.125-.187	Nos. 14,12,10	twstd plastic
PS322	.187 - .312	Nos. 14,12,10,8 Nos.8,6	twstd rubber twstd plastic
PS323	.312-.437	Nos. 6,4	twstd rubber

Flowing Well Spools with O-Rings


Order No.	Well Size	Drop Pipe Tapping	Wt.
5S4PSF	4"	1 1/2"	13
6S4PSF	5"	2"	18
7S4PSF	6"	2"	22

Hold-Down Spider

Order No.	Upper Case Size	Wt.
120UB	5"	3
10UE	6"	4
160UC	7"	5

Hold-Down Spider Rating for Flowing Wells

Pitless Unit	Rated Flowing PSI	Set screw Torque
PS45	75	290 in. lb.
PS56	75	290 in. lb.
PS67	56	290 in. lb.

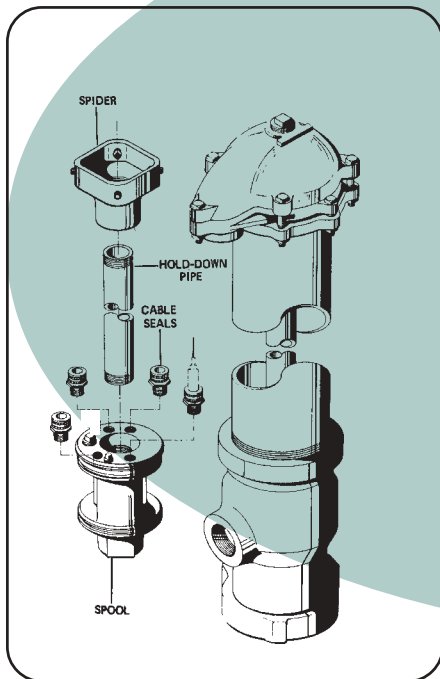

133 Enterprise Street
Evansville, WI 53536