



- ◆PRINT THIS PAGE
- ◆VIEW REPAIR PARTS
- ◆BACK TO
- ◆HOME

DRINKING FOUNTAIN PUMPS

Table of Hand & Drinking Fountain Pump Specifications*

Order Number	Type	Stroke Length		Drop Pipe Tapping	Spout	Rod Size	Rod Thread
		Hand	Power				
11HD	Force	5-7 1/2-10	11	1-1/4	Syphon	7/16	7/16-14NC
11HDA	Force	5-7 1/2-10	11	2	Syphon	7/16	7/16-14NC
12HD	Force	5-7 1/2-10	11	1-1/4	Bibb	7/16	7/16-14NC
12HDA	Force	5-7 1/2-10	11	2	Bibb	7/16	7/16-14NC
11HA	Lift	6	--	1-1/4	Syphon	7/16	Set Screw
1DFHCS	Drinking	5-7 1/2-10	11	1-1/4	Fountain	7/16	7/16-14NC
1DFHFS	Fountain						

*All specifications are in inches unless otherwise noted.

The **Monitor® Drinking Fountain Pump** is used on many golf courses, campgrounds, roadside parks and picnic areas. A few strokes of the handle fills a reservoir with water which, without further pumping becomes a noiseless smooth flowing Drinking Fountain. A spring-loaded hand-lift valve allows water from the reservoir to flow out a hydrant for filling a jug or bucket. The pump stand is more secure from contamination. All interior surfaces are inclined for complete drainage. All access holes are screened for vermin resistance. The drain pipe is anchored at ground level, into the pumps concrete foundation, to prevent abuse. Rugged cast iron construction assures years of dependable service. The Drinking Fountain Pump is available in 2 models.

1DFHCS PUMP STAND – for cased well applications, attaches to a flange mounted on top of a well casing. A vermin resistant sealed flange is available for a 4", 5" or 6" well casing. Pump weighs 120 lbs.


1DFHFS PUMP STAND – for cased well applications, attaches directly to a 4", 5" or 6" well casing. The well casing extends 18" above grade. (Ohio Pattern Base Pump) Weighs 120 lbs. Pump flanges will not adapt to this style.

158DP FOUNTAIN UNIT – This unit replaces the reservoir and bowl on either the 1HF or 1HC Drinking Fountain Pump. Weighs 45 lbs.

100DPS HAND PUMP SHROUD CONVERSION KIT – This sanitary unit replaces the pump cap and flat bar, on Monitor hand pumps, 11HD, 12HD, 1DFHF, 1DFHC & 1DFHT. Recommended by many federal and state environmental agencies.


10DP Rubber Bumper Bag Assembly is a replacement part that is used to keep the pump handle from hitting on the pump base.

199DP Fountain Screening Kit. Kit contains a cover gasket, screen vent, nozzle screen, filter washer and holding spring to make the Monitor drinking fountain pumps vermin resistant.

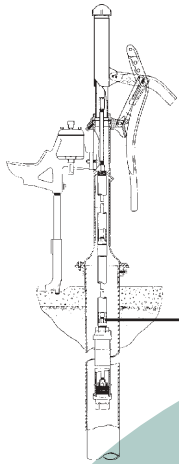

Draining "Weep" hole, approximately 1/8" to avoid freezing


1DFHCS

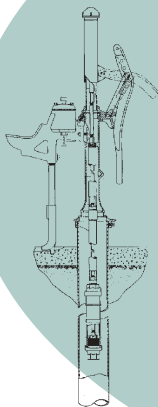

1DFHFS



100DPS



158DP



133 Enterprise Street
Evansville, WI 53536